

# S-SERIES Combustion Switches

## Pressure Switches Designed to UL or FM Requirements for Combustion Service

### Features:

- Set point repeatability,  $\pm 1\%$  of operating range.
- UL Listed in the gas and oil equipment list.
- FM Approved as “pressure supervisory switches.”
- Externally visible pressure setting scales.
- External adjusting nuts.
- Choice of fixed or full-range adjustable deadbands.
- Choice of single or two-stage units.
- Mounts in any position.
- Rugged and vibration resistant.
- Separate electrical, pressure and adjusting chambers.
- Mix and match switch and transducer components for increased stock flexibility or to change pressure ranges in field.
- Withstands high surge pressures.

### General Description:

ASCO S-Series combustion switches consist of a switch unit and a transducer unit. They can be ordered separately for customer stocking and/or field assembly or as a complete factory-assembled unit.

### Switch

S-Series combustion switch units incorporate the unique ASCO TRI-POINT alternating fulcrum balance plate to control the operation of one or more electrical snap-action switches. The electrical snap-action switch together with the adjusting mechanism is a fully-tested, self-contained subassembly.

### Transducer

Transducer unit incorporates a diaphragm/piston type pressure sensor, and is also a fully-tested, self-contained subassembly.

### Operation

When pressure is applied to the transducer it is converted into movement of the piston. This piston movement is then used to control the operation of the electrical snap-action switch in the switch unit.

**Options** (See pages [34-35](#))

**Dimensions** (See page [15](#))




### Standard Electrical Ratings

#### SA, SD and SE Series ①

- 5 Amp Res., 125, 250 VAC
- 1/8 HP, 125 VAC
- 1/4 HP, 250 VAC
- 1/2 Amp Res., 125 VDC
- 1/4 Amp Res., 250 VDC

#### SB and SC Series

- 5 Amp Res., 125, 250 VAC
- 1/4 HP, 125 VAC
- 1/2 HP, 250 VAC
- .4 Amp Res., 125, VDC



① SD and SE Series not FM Approved.

### Standard Temperature Ratings

- Ambient:** -4°F (-20°C) to 140°F (60°C)
- Fluid:** For Buna “N” or Neoprene Diaphragm  
-4°F (-20°C) to 180°F (82°C)
- For Viton Diaphragm  
-4°F (-20°C) to 250°F (121°C)
- For 316 SS Diaphragm  
-50°F (-45°C) to 300°F (149°C)

## UL Requirements

Underwriters' Laboratories, Inc.'s Standard UL 353 defines construction and performance requirements for limit controls.

### Switch

S-Series combustion switch units when mated to the pressure transducers described below form pressure switches in accordance with UL requirements.

### Transducers

**Fuel Gas** – UL requires a pressure transducer with a secondary chamber. This chamber allows the gas to be vented to a safe location in the event of primary sensing element rupture. The “double chamber” with vent pressure transducers meet this requirement.

**Fuel Oil** – UL requirements for fuel oil applications waive the double chamber requirement, providing the sensing element is made of Type 316 or 321 SS. S-Series type 316 SS pressure transducers are designed to meet this requirement.

**General Service** – Pressure transducers for water, steam and air service may be of the single chamber design.

### Enclosures

ASCO TRI-POINT S-Series switches are available in three standard enclosures. All of these enclosed units are made in accordance with NEMA and UL standards.

**General Purpose** – Type 1. These enclosures are designed for indoor use to protect personnel from accidental contact with the equipment. S-Series general purpose switch units consist of a copper-free\* aluminum die-cast body with a formed copper-free\* aluminum cover; two 3/4” conduit hubs with one plug are provided.

**Watertight** – Type 4. Watertight and dust-tight enclosures are intended for use indoors and outdoors to protect the enclosed equipment against splashing or falling water, windblown dust and water, hose directed water, and severe external condensation. S-Series watertight switch units have a copper-free\* aluminum die-cast body and a formed copper-free\* aluminum cover with Buna “N” gaskets; two 3/4” conduit hubs with one plug are provided.

**Explosion-Proof** – Types 7 and 9. Type 7 enclosures are intended for use in locations defined by the National Electrical Code as Class I. Type 9 enclosures are intended for Class II locations.

Class I locations are those in which flammable gases are or may be present in the air in sufficient quantities to produce explosive or ignitable mixtures. Class I locations are classified by group letter, which defines particular atmospheres. Division 1 locations are areas where the hazardous concentration exists continuously, intermittently or periodically under normal operating conditions. Division 2 locations are those where the hazardous vapors are present only in case of accidental rupture or breakdown of equipment.

ASCO TRI-POINT explosion-proof enclosures with letter **B**, **C** or **D** in the fifth position are listed for Class I, Groups B, C, and D, Division 1. They are also suitable for the less stringent Division 2 environment.

Class II locations are those which are hazardous because of the presence of combustible dust. All ASCO TRI-POINT explosion-proof enclosures are listed for Groups E, F, and G locations.

The switch body and cover are die-cast copper-free\* aluminum with a Buna “N” gasket. Two 3/4” conduit hubs with one plug are provided.

## FM Requirements

**Fuel Gas and Fuel Oil** – FM requires that fuel gas and fuel oil pressure supervisory switches shall have a visible external means of determining switch position. No specific constructions are required for the pressure transducer. Switch units with visual position indication (suffix “V”) in conjunction with single chamber pressure transducers will meet these requirements.

**General Service** – Standard switch units with an adjusting nut cover, when mated to single chamber transducers, meet FM requirements for general applications such as “airflow interlocking switches”.

### Enclosures

**General Purpose** – Designed to Type 1 specifications for indoor applications. Die casting is copper-free\* aluminum; covers are polycarbonate. Two 3/4” conduit hubs with one plug are provided.

**Watertight** – Designed to Types 4 specifications for indoor/outdoor use. Die casting is copper-free\* aluminum. Cover are polycarbonate and gaskets are neoprene. Two 3/4” conduit hubs with one plug are provided.

\* Less than 0.6% copper.

# S-SERIES Combustion Switches

## How to Select and Order

ASCO S-Series switches consist of two components, the switch unit and the transducer unit.

### How to Select

1. Select the adjustable operating range based on desired actuation pressure.
2. Check that proof pressure is sufficient.
3. Read across and select the desired S-Series switch unit with the proper enclosure.
4. Continue across and select a matching transducer unit compatible with the fluid.

### How to Order

**Factory assembled** – Simply order the switch and transducer unit by catalog number joined by a slash (/), e.g., SA30D/TA31A11.

**Field assembled** – Simply order the switch and transducer units separately by individual catalog number, e.g., one SA30D and one TA31A11.

Select S-Series pressure switch										SA, SB, SC, SD and SE unit below				
SA Switch Unit			SB, SD or SE Switch Unit				SC Switch Unit							
<p><b>Single-Stage Adjustable Deadband</b> units allow independent adjustment of the set and reset points over the full operating range of the switch. The minimum difference between set and reset points is the deadband listed below; the maximum difference is the full range of the switch.</p>  <p>UL General Purpose</p>			<p><b>SB Switch Unit: Single-Stage Fixed Deadband</b> units have an adjustable set point and a non-adjustable automatic reset point.</p> <p><b>SD Switch Unit: Manual reset on decreasing pressure</b> units operate automatically on increasing pressure and must be reset manually on decreasing pressure. (To order, change second digit to letter "D", e.g., S[ ]30D becomes S[D]30D).</p> <p><b>SE Switch Unit: Manual reset on increasing pressure</b> units operate automatically on decreasing pressure and must be reset manually on increasing pressure. (To order, change second digit to letter "E", e.g., S[ ]30D becomes S[E]30D).</p>				<p><b>Two-Stage Fixed Deadband</b> units consist of two separate snap-action switches, each with an independently adjustable set point and non-adjustable reset point. The difference between the set and reset points of each switch is the deadband listed below; the minimum difference between the set points of the two switches is the separation.</p>  <p>FM General Purpose</p>							

## Select transducer unit below



UL Listed FM Approved

Standard connection is 1/4" NPT

### Transducer Unit

These **gauge pressure type transducers** provide for one pressure connection in the bottom of the transducer. They are diaphragm/piston type transducers using an elastomer in contact with the fluid, backed by a piston cylinder. UL requires a double chamber transducer for fuel gas service and single chamber 316 SS transducer for fuel oil service.

Specifications		Adjustable Deadband				Fixed Deadband or Manual Reset ②				Two-Stage Fixed Deadband					Transducer Units																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
Adjustable Operating Range (psig)	Proof Pressure (psig)	Adjustable Deadband Maximum Full Scale Minimum At Mid-Range (psig) ①	General Purpose Catalog No.	Watertight Enclosure Catalog No.	Explosion-Proof Catalog No.	Fixed Deadband At Mid-Range (psig.) ①	General Purpose Catalog No.	Watertight Enclosure Catalog No.	Explosion-Proof Catalog No.	Fixed Deadband At Mid-Range (psig) ①	Separation Maximum Full Scale Minimum At Mid-Range (psig) ①	General Purpose Catalog No.	Watertight Enclosure Catalog No.	Explosion-Proof Catalog No.	Aluminum & Buna "N" Catalog No.	Brass & Buna "N" Catalog No.	All 316 SS ③ Catalog No.	316 SS & Viton ④ Catalog No.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
																			<table border="1"> <thead> <tr> <th colspan="15"></th> <th colspan="2">Fuel Gas</th> <th colspan="1">Fuel Oil</th> </tr> </thead> <tbody> <tr> <td>UL Listed</td> <td>0 - 27" W.C.</td> <td>15</td> <td>2.0" W.C.</td> <td>SA30D</td> <td>SA31D</td> <td>SA32D</td> <td>1.2" W.C.</td> <td>SB30D</td> <td>SB31D</td> <td>SB32D</td> <td>1.7" W.C.</td> <td>2.7" W.C.</td> <td>SC30D</td> <td>SC31D</td> <td>SC32D</td> <td>TA31A11</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>0 - 65" W.C.</td> <td>15</td> <td>2.5" W.C.</td> <td>SA20D</td> <td>SA21D</td> <td>SA22D</td> <td>1.4" W.C.</td> <td>SB20D</td> <td>SB21D</td> <td>SB22D</td> <td>2.0" W.C.</td> <td>6.5" W.C.</td> <td>SC20D</td> <td>SC21D</td> <td>SC22D</td> <td>TA21A11</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>15 - 140" W.C.</td> <td>25</td> <td>6.0" W.C.</td> <td>SA20D</td> <td>SA21D</td> <td>SA22D</td> <td>3.0" W.C.</td> <td>SB20D</td> <td>SB21D</td> <td>SB22D</td> <td>4.0" W.C.</td> <td>14.0" W.C.</td> <td>SC20D</td> <td>SC21D</td> <td>SC22D</td> <td>TB21A11</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>15 - 250" W.C.</td> <td>25</td> <td>10.0" W.C.</td> <td>SA10D</td> <td>SA11D</td> <td>SA12D</td> <td>6.0" W.C.</td> <td>SB10D</td> <td>SB11D</td> <td>SB12D</td> <td>7.0" W.C.</td> <td>25.0" W.C.</td> <td>SC10D</td> <td>SC11D</td> <td>SC12D</td> <td>TB11A11</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>25 - 400" W.C.</td> <td>25</td> <td>15.0" W.C.</td> <td>SA10D</td> <td>SA11D</td> <td>SA12D</td> <td>8.0" W.C.</td> <td>SB10D</td> <td>SB11D</td> <td>SB12D</td> <td>13.0" W.C.</td> <td>40.0" W.C.</td> <td>SC10D</td> <td>SC11D</td> <td>SC12D</td> <td>TC11A11</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>0.8 - 9.0</td> <td>150</td> <td>1.4</td> <td>SA40D</td> <td>SA41D</td> <td>SA42D</td> <td>0.9</td> <td>SB40D</td> <td>SB41D</td> <td>SB42D</td> <td>1.5</td> <td>1.6</td> <td>SC40D</td> <td>SC41D</td> <td>SC42D</td> <td>---</td> <td>---</td> <td>TE40A44</td> <td>---</td> </tr> <tr> <td></td> <td>1.0 - 18</td> <td>150</td> <td>4.6</td> <td>SA30D</td> <td>SA31D</td> <td>SA32D</td> <td>0.6</td> <td>SB30D</td> <td>SB31D</td> <td>SB32D</td> <td>1.0</td> <td>1.8</td> <td>SC30D</td> <td>SC31D</td> <td>SC32D</td> <td>---</td> <td>---</td> <td>TE30A44</td> <td>---</td> </tr> <tr> <td></td> <td>1.5 - 30</td> <td>200</td> <td>4.0</td> <td>SA30D</td> <td>SA31D</td> <td>SA32D</td> <td>1.5</td> <td>SB30D</td> <td>SB31D</td> <td>SB32D</td> <td>2.0</td> <td>3.0</td> <td>SC30D</td> <td>SC31D</td> <td>SC32D</td> <td>---</td> <td>TF32A21</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>1.5 - 36</td> <td>150</td> <td>3.3</td> <td>SA20D</td> <td>SA21D</td> <td>SA22D</td> <td>1.4</td> <td>SB20D</td> <td>SB21D</td> <td>SB22D</td> <td>2.0</td> <td>3.6</td> <td>SC20D</td> <td>SC21D</td> <td>SC22D</td> <td>---</td> <td>---</td> <td>TE20A44</td> <td>---</td> </tr> <tr> <td></td> <td>2.0 - 60</td> <td>150</td> <td>5.4</td> <td>SA10D</td> <td>SA11D</td> <td>SA12D</td> <td>2.3</td> <td>SB10D</td> <td>SB11D</td> <td>SB12D</td> <td>3.5</td> <td>6.0</td> <td>SC10D</td> <td>SC11D</td> <td>SC12D</td> <td>---</td> <td>---</td> <td>TE10A44</td> <td>---</td> </tr> <tr> <td></td> <td>2.0 - 60</td> <td>200</td> <td>5.0</td> <td>SA20D</td> <td>SA21D</td> <td>SA22D</td> <td>2.0</td> <td>SB20D</td> <td>SB21D</td> <td>SB22D</td> <td>3.0</td> <td>6.0</td> <td>SC20D</td> <td>SC21D</td> <td>SC22D</td> <td>---</td> <td>TF22A21</td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td>3.0 - 100</td> <td>200</td> <td>9.0</td> <td>SA10D</td> <td>SA11D</td> <td>SA12D</td> <td>3.7</td> <td>SB10D</td> <td>SB11D</td> <td>SB12D</td> <td>5.0</td> <td>10.0</td> <td>SC10D</td> <td>SC11D</td> <td>SC12D</td> <td>---</td> <td>TF12A21</td> <td>TF10A44</td> <td>---</td> </tr> <tr> <td colspan="18"> <table border="1"> <thead> <tr> <th colspan="18">Fuel Gas and Fuel Oil</th> </tr> </thead> <tbody> <tr> <td>FM Approved</td> <td>2 - 12" W.C.</td> <td>25</td> <td>1.5" W.C.</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>1.0" W.C.</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>1.4" W.C.</td> <td>2.4" W.C.</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TA40A11F</td> <td>---</td> <td>---</td> <td>TA40A32F</td> </tr> <tr> <td></td> <td>2 - 27" W.C.</td> <td>25</td> <td>2.0" W.C.</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>1.2" W.C.</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>1.7" W.C.</td> <td>2.7" W.C.</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TA30A11F</td> <td>---</td> <td>---</td> <td>TA30A32F</td> </tr> <tr> <td></td> <td>2 - 65" W.C.</td> <td>25</td> <td>2.5" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>1.4" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>2.0" W.C.</td> <td>6.5" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TA20A11F</td> <td>---</td> <td>---</td> <td>TA20A32F</td> </tr> <tr> <td></td> <td>15 - 140" W.C.</td> <td>40</td> <td>6.0" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>3.0" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>4.0" W.C.</td> <td>14.0" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TB20A11</td> <td>---</td> <td>---</td> <td>TB20A32</td> </tr> <tr> <td></td> <td>15 - 250" W.C.</td> <td>40</td> <td>10.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>6.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>7.0" W.C.</td> <td>25.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TB10A11</td> <td>---</td> <td>---</td> <td>TB10A32</td> </tr> <tr> <td></td> <td>25 - 400" W.C.</td> <td>40</td> <td>15.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>8.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>13.0" W.C.</td> <td>40.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TC10A11</td> <td>---</td> <td>---</td> <td>TC10A32</td> </tr> <tr> <td></td> <td>0.4 - 4.5</td> <td>100</td> <td>0.4</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>0.3</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>0.5</td> <td>0.7</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TD40A11</td> <td>TD40A21</td> <td>---</td> <td>TD40A42</td> </tr> <tr> <td></td> <td>0.8 - 9.0</td> <td>100</td> <td>0.6</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>0.3</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>0.5</td> <td>0.9</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TD30A11</td> <td>TD30A21</td> <td>---</td> <td>TD30A42</td> </tr> <tr> <td></td> <td>1.0 - 18</td> <td>100</td> <td>1.1</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.4</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>0.5</td> <td>1.8</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TD20A11</td> <td>TD20A21</td> <td>---</td> <td>TD20A42</td> </tr> <tr> <td></td> <td>1.5 - 36</td> <td>150</td> <td>2.2</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.9</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>1.2</td> <td>3.6</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TE20A11</td> <td>TE20A21</td> <td>---</td> <td>TE20A42</td> </tr> <tr> <td></td> <td>2.0 - 60</td> <td>150</td> <td>3.6</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>1.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>2.1</td> <td>6.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TE10A11</td> <td>TE10A21</td> <td>---</td> <td>TE10A42</td> </tr> <tr> <td></td> <td>3.0 - 100</td> <td>200</td> <td>6.0</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>2.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>3.5</td> <td>10.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TF10A11</td> <td>TF10A21</td> <td>---</td> <td>TF10A42</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>																																	Fuel Gas		Fuel Oil	UL Listed	0 - 27" W.C.	15	2.0" W.C.	SA30D	SA31D	SA32D	1.2" W.C.	SB30D	SB31D	SB32D	1.7" W.C.	2.7" W.C.	SC30D	SC31D	SC32D	TA31A11	---	---	---		0 - 65" W.C.	15	2.5" W.C.	SA20D	SA21D	SA22D	1.4" W.C.	SB20D	SB21D	SB22D	2.0" W.C.	6.5" W.C.	SC20D	SC21D	SC22D	TA21A11	---	---	---		15 - 140" W.C.	25	6.0" W.C.	SA20D	SA21D	SA22D	3.0" W.C.	SB20D	SB21D	SB22D	4.0" W.C.	14.0" W.C.	SC20D	SC21D	SC22D	TB21A11	---	---	---		15 - 250" W.C.	25	10.0" W.C.	SA10D	SA11D	SA12D	6.0" W.C.	SB10D	SB11D	SB12D	7.0" W.C.	25.0" W.C.	SC10D	SC11D	SC12D	TB11A11	---	---	---		25 - 400" W.C.	25	15.0" W.C.	SA10D	SA11D	SA12D	8.0" W.C.	SB10D	SB11D	SB12D	13.0" W.C.	40.0" W.C.	SC10D	SC11D	SC12D	TC11A11	---	---	---		0.8 - 9.0	150	1.4	SA40D	SA41D	SA42D	0.9	SB40D	SB41D	SB42D	1.5	1.6	SC40D	SC41D	SC42D	---	---	TE40A44	---		1.0 - 18	150	4.6	SA30D	SA31D	SA32D	0.6	SB30D	SB31D	SB32D	1.0	1.8	SC30D	SC31D	SC32D	---	---	TE30A44	---		1.5 - 30	200	4.0	SA30D	SA31D	SA32D	1.5	SB30D	SB31D	SB32D	2.0	3.0	SC30D	SC31D	SC32D	---	TF32A21	---	---		1.5 - 36	150	3.3	SA20D	SA21D	SA22D	1.4	SB20D	SB21D	SB22D	2.0	3.6	SC20D	SC21D	SC22D	---	---	TE20A44	---		2.0 - 60	150	5.4	SA10D	SA11D	SA12D	2.3	SB10D	SB11D	SB12D	3.5	6.0	SC10D	SC11D	SC12D	---	---	TE10A44	---		2.0 - 60	200	5.0	SA20D	SA21D	SA22D	2.0	SB20D	SB21D	SB22D	3.0	6.0	SC20D	SC21D	SC22D	---	TF22A21	---	---		3.0 - 100	200	9.0	SA10D	SA11D	SA12D	3.7	SB10D	SB11D	SB12D	5.0	10.0	SC10D	SC11D	SC12D	---	TF12A21	TF10A44	---	<table border="1"> <thead> <tr> <th colspan="18">Fuel Gas and Fuel Oil</th> </tr> </thead> <tbody> <tr> <td>FM Approved</td> <td>2 - 12" W.C.</td> <td>25</td> <td>1.5" W.C.</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>1.0" W.C.</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>1.4" W.C.</td> <td>2.4" W.C.</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TA40A11F</td> <td>---</td> <td>---</td> <td>TA40A32F</td> </tr> <tr> <td></td> <td>2 - 27" W.C.</td> <td>25</td> <td>2.0" W.C.</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>1.2" W.C.</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>1.7" W.C.</td> <td>2.7" W.C.</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TA30A11F</td> <td>---</td> <td>---</td> <td>TA30A32F</td> </tr> <tr> <td></td> <td>2 - 65" W.C.</td> <td>25</td> <td>2.5" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>1.4" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>2.0" W.C.</td> <td>6.5" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TA20A11F</td> <td>---</td> <td>---</td> <td>TA20A32F</td> </tr> <tr> <td></td> <td>15 - 140" W.C.</td> <td>40</td> <td>6.0" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>3.0" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>4.0" W.C.</td> <td>14.0" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TB20A11</td> <td>---</td> <td>---</td> <td>TB20A32</td> </tr> <tr> <td></td> <td>15 - 250" W.C.</td> <td>40</td> <td>10.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>6.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>7.0" W.C.</td> <td>25.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TB10A11</td> <td>---</td> <td>---</td> <td>TB10A32</td> </tr> <tr> <td></td> <td>25 - 400" W.C.</td> <td>40</td> <td>15.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>8.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>13.0" W.C.</td> <td>40.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TC10A11</td> <td>---</td> <td>---</td> <td>TC10A32</td> </tr> <tr> <td></td> <td>0.4 - 4.5</td> <td>100</td> <td>0.4</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>0.3</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>0.5</td> <td>0.7</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TD40A11</td> <td>TD40A21</td> <td>---</td> <td>TD40A42</td> </tr> <tr> <td></td> <td>0.8 - 9.0</td> <td>100</td> <td>0.6</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>0.3</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>0.5</td> <td>0.9</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TD30A11</td> <td>TD30A21</td> <td>---</td> <td>TD30A42</td> </tr> <tr> <td></td> <td>1.0 - 18</td> <td>100</td> <td>1.1</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.4</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>0.5</td> <td>1.8</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TD20A11</td> <td>TD20A21</td> <td>---</td> <td>TD20A42</td> </tr> <tr> <td></td> <td>1.5 - 36</td> <td>150</td> <td>2.2</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.9</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>1.2</td> <td>3.6</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TE20A11</td> <td>TE20A21</td> <td>---</td> <td>TE20A42</td> </tr> <tr> <td></td> <td>2.0 - 60</td> <td>150</td> <td>3.6</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>1.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>2.1</td> <td>6.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TE10A11</td> <td>TE10A21</td> <td>---</td> <td>TE10A42</td> </tr> <tr> <td></td> <td>3.0 - 100</td> <td>200</td> <td>6.0</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>2.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>3.5</td> <td>10.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TF10A11</td> <td>TF10A21</td> <td>---</td> <td>TF10A42</td> </tr> </tbody> </table>																		Fuel Gas and Fuel Oil																		FM Approved	2 - 12" W.C.	25	1.5" W.C.	SA40DV	SA41DV	---	1.0" W.C.	SB40DV	SB41DV	---	1.4" W.C.	2.4" W.C.	SC40DV	SC41DV	---	TA40A11F	---	---	TA40A32F		2 - 27" W.C.	25	2.0" W.C.	SA30DV	SA31DV	---	1.2" W.C.	SB30DV	SB31DV	---	1.7" W.C.	2.7" W.C.	SC30DV	SC31DV	---	TA30A11F	---	---	TA30A32F		2 - 65" W.C.	25	2.5" W.C.	SA20DV	SA21DV	---	1.4" W.C.	SB20DV	SB21DV	---	2.0" W.C.	6.5" W.C.	SC20DV	SC21DV	---	TA20A11F	---	---	TA20A32F		15 - 140" W.C.	40	6.0" W.C.	SA20DV	SA21DV	---	3.0" W.C.	SB20DV	SB21DV	---	4.0" W.C.	14.0" W.C.	SC20DV	SC21DV	---	TB20A11	---	---	TB20A32		15 - 250" W.C.	40	10.0" W.C.	SA10DV	SA11DV	---	6.0" W.C.	SB10DV	SB11DV	---	7.0" W.C.	25.0" W.C.	SC10DV	SC11DV	---	TB10A11	---	---	TB10A32		25 - 400" W.C.	40	15.0" W.C.	SA10DV	SA11DV	---	8.0" W.C.	SB10DV	SB11DV	---	13.0" W.C.	40.0" W.C.	SC10DV	SC11DV	---	TC10A11	---	---	TC10A32		0.4 - 4.5	100	0.4	SA40DV	SA41DV	---	0.3	SB40DV	SB41DV	---	0.5	0.7	SC40DV	SC41DV	---	TD40A11	TD40A21	---	TD40A42		0.8 - 9.0	100	0.6	SA30DV	SA31DV	---	0.3	SB30DV	SB31DV	---	0.5	0.9	SC30DV	SC31DV	---	TD30A11	TD30A21	---	TD30A42		1.0 - 18	100	1.1	SA20DV	SA21DV	---	0.4	SB20DV	SB21DV	---	0.5	1.8	SC20DV	SC21DV	---	TD20A11	TD20A21	---	TD20A42		1.5 - 36	150	2.2	SA20DV	SA21DV	---	0.9	SB20DV	SB21DV	---	1.2	3.6	SC20DV	SC21DV	---	TE20A11	TE20A21	---	TE20A42		2.0 - 60	150	3.6	SA10DV	SA11DV	---	1.5	SB10DV	SB11DV	---	2.1	6.0	SC10DV	SC11DV	---	TE10A11	TE10A21	---	TE10A42	
															Fuel Gas		Fuel Oil																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
UL Listed	0 - 27" W.C.	15	2.0" W.C.	SA30D	SA31D	SA32D	1.2" W.C.	SB30D	SB31D	SB32D	1.7" W.C.	2.7" W.C.	SC30D	SC31D	SC32D	TA31A11	---	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	0 - 65" W.C.	15	2.5" W.C.	SA20D	SA21D	SA22D	1.4" W.C.	SB20D	SB21D	SB22D	2.0" W.C.	6.5" W.C.	SC20D	SC21D	SC22D	TA21A11	---	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	15 - 140" W.C.	25	6.0" W.C.	SA20D	SA21D	SA22D	3.0" W.C.	SB20D	SB21D	SB22D	4.0" W.C.	14.0" W.C.	SC20D	SC21D	SC22D	TB21A11	---	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	15 - 250" W.C.	25	10.0" W.C.	SA10D	SA11D	SA12D	6.0" W.C.	SB10D	SB11D	SB12D	7.0" W.C.	25.0" W.C.	SC10D	SC11D	SC12D	TB11A11	---	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	25 - 400" W.C.	25	15.0" W.C.	SA10D	SA11D	SA12D	8.0" W.C.	SB10D	SB11D	SB12D	13.0" W.C.	40.0" W.C.	SC10D	SC11D	SC12D	TC11A11	---	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	0.8 - 9.0	150	1.4	SA40D	SA41D	SA42D	0.9	SB40D	SB41D	SB42D	1.5	1.6	SC40D	SC41D	SC42D	---	---	TE40A44	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	1.0 - 18	150	4.6	SA30D	SA31D	SA32D	0.6	SB30D	SB31D	SB32D	1.0	1.8	SC30D	SC31D	SC32D	---	---	TE30A44	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	1.5 - 30	200	4.0	SA30D	SA31D	SA32D	1.5	SB30D	SB31D	SB32D	2.0	3.0	SC30D	SC31D	SC32D	---	TF32A21	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	1.5 - 36	150	3.3	SA20D	SA21D	SA22D	1.4	SB20D	SB21D	SB22D	2.0	3.6	SC20D	SC21D	SC22D	---	---	TE20A44	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	2.0 - 60	150	5.4	SA10D	SA11D	SA12D	2.3	SB10D	SB11D	SB12D	3.5	6.0	SC10D	SC11D	SC12D	---	---	TE10A44	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	2.0 - 60	200	5.0	SA20D	SA21D	SA22D	2.0	SB20D	SB21D	SB22D	3.0	6.0	SC20D	SC21D	SC22D	---	TF22A21	---	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	3.0 - 100	200	9.0	SA10D	SA11D	SA12D	3.7	SB10D	SB11D	SB12D	5.0	10.0	SC10D	SC11D	SC12D	---	TF12A21	TF10A44	---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
<table border="1"> <thead> <tr> <th colspan="18">Fuel Gas and Fuel Oil</th> </tr> </thead> <tbody> <tr> <td>FM Approved</td> <td>2 - 12" W.C.</td> <td>25</td> <td>1.5" W.C.</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>1.0" W.C.</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>1.4" W.C.</td> <td>2.4" W.C.</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TA40A11F</td> <td>---</td> <td>---</td> <td>TA40A32F</td> </tr> <tr> <td></td> <td>2 - 27" W.C.</td> <td>25</td> <td>2.0" W.C.</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>1.2" W.C.</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>1.7" W.C.</td> <td>2.7" W.C.</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TA30A11F</td> <td>---</td> <td>---</td> <td>TA30A32F</td> </tr> <tr> <td></td> <td>2 - 65" W.C.</td> <td>25</td> <td>2.5" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>1.4" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>2.0" W.C.</td> <td>6.5" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TA20A11F</td> <td>---</td> <td>---</td> <td>TA20A32F</td> </tr> <tr> <td></td> <td>15 - 140" W.C.</td> <td>40</td> <td>6.0" W.C.</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>3.0" W.C.</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>4.0" W.C.</td> <td>14.0" W.C.</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TB20A11</td> <td>---</td> <td>---</td> <td>TB20A32</td> </tr> <tr> <td></td> <td>15 - 250" W.C.</td> <td>40</td> <td>10.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>6.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>7.0" W.C.</td> <td>25.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TB10A11</td> <td>---</td> <td>---</td> <td>TB10A32</td> </tr> <tr> <td></td> <td>25 - 400" W.C.</td> <td>40</td> <td>15.0" W.C.</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>8.0" W.C.</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>13.0" W.C.</td> <td>40.0" W.C.</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TC10A11</td> <td>---</td> <td>---</td> <td>TC10A32</td> </tr> <tr> <td></td> <td>0.4 - 4.5</td> <td>100</td> <td>0.4</td> <td>SA40DV</td> <td>SA41DV</td> <td>---</td> <td>0.3</td> <td>SB40DV</td> <td>SB41DV</td> <td>---</td> <td>0.5</td> <td>0.7</td> <td>SC40DV</td> <td>SC41DV</td> <td>---</td> <td>TD40A11</td> <td>TD40A21</td> <td>---</td> <td>TD40A42</td> </tr> <tr> <td></td> <td>0.8 - 9.0</td> <td>100</td> <td>0.6</td> <td>SA30DV</td> <td>SA31DV</td> <td>---</td> <td>0.3</td> <td>SB30DV</td> <td>SB31DV</td> <td>---</td> <td>0.5</td> <td>0.9</td> <td>SC30DV</td> <td>SC31DV</td> <td>---</td> <td>TD30A11</td> <td>TD30A21</td> <td>---</td> <td>TD30A42</td> </tr> <tr> <td></td> <td>1.0 - 18</td> <td>100</td> <td>1.1</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.4</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>0.5</td> <td>1.8</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TD20A11</td> <td>TD20A21</td> <td>---</td> <td>TD20A42</td> </tr> <tr> <td></td> <td>1.5 - 36</td> <td>150</td> <td>2.2</td> <td>SA20DV</td> <td>SA21DV</td> <td>---</td> <td>0.9</td> <td>SB20DV</td> <td>SB21DV</td> <td>---</td> <td>1.2</td> <td>3.6</td> <td>SC20DV</td> <td>SC21DV</td> <td>---</td> <td>TE20A11</td> <td>TE20A21</td> <td>---</td> <td>TE20A42</td> </tr> <tr> <td></td> <td>2.0 - 60</td> <td>150</td> <td>3.6</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>1.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>2.1</td> <td>6.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TE10A11</td> <td>TE10A21</td> <td>---</td> <td>TE10A42</td> </tr> <tr> <td></td> <td>3.0 - 100</td> <td>200</td> <td>6.0</td> <td>SA10DV</td> <td>SA11DV</td> <td>---</td> <td>2.5</td> <td>SB10DV</td> <td>SB11DV</td> <td>---</td> <td>3.5</td> <td>10.0</td> <td>SC10DV</td> <td>SC11DV</td> <td>---</td> <td>TF10A11</td> <td>TF10A21</td> <td>---</td> <td>TF10A42</td> </tr> </tbody> </table>																		Fuel Gas and Fuel Oil																		FM Approved	2 - 12" W.C.	25	1.5" W.C.	SA40DV	SA41DV	---	1.0" W.C.	SB40DV	SB41DV	---	1.4" W.C.	2.4" W.C.	SC40DV	SC41DV	---	TA40A11F	---	---	TA40A32F		2 - 27" W.C.	25	2.0" W.C.	SA30DV	SA31DV	---	1.2" W.C.	SB30DV	SB31DV	---	1.7" W.C.	2.7" W.C.	SC30DV	SC31DV	---	TA30A11F	---	---	TA30A32F		2 - 65" W.C.	25	2.5" W.C.	SA20DV	SA21DV	---	1.4" W.C.	SB20DV	SB21DV	---	2.0" W.C.	6.5" W.C.	SC20DV	SC21DV	---	TA20A11F	---	---	TA20A32F		15 - 140" W.C.	40	6.0" W.C.	SA20DV	SA21DV	---	3.0" W.C.	SB20DV	SB21DV	---	4.0" W.C.	14.0" W.C.	SC20DV	SC21DV	---	TB20A11	---	---	TB20A32		15 - 250" W.C.	40	10.0" W.C.	SA10DV	SA11DV	---	6.0" W.C.	SB10DV	SB11DV	---	7.0" W.C.	25.0" W.C.	SC10DV	SC11DV	---	TB10A11	---	---	TB10A32		25 - 400" W.C.	40	15.0" W.C.	SA10DV	SA11DV	---	8.0" W.C.	SB10DV	SB11DV	---	13.0" W.C.	40.0" W.C.	SC10DV	SC11DV	---	TC10A11	---	---	TC10A32		0.4 - 4.5	100	0.4	SA40DV	SA41DV	---	0.3	SB40DV	SB41DV	---	0.5	0.7	SC40DV	SC41DV	---	TD40A11	TD40A21	---	TD40A42		0.8 - 9.0	100	0.6	SA30DV	SA31DV	---	0.3	SB30DV	SB31DV	---	0.5	0.9	SC30DV	SC31DV	---	TD30A11	TD30A21	---	TD30A42		1.0 - 18	100	1.1	SA20DV	SA21DV	---	0.4	SB20DV	SB21DV	---	0.5	1.8	SC20DV	SC21DV	---	TD20A11	TD20A21	---	TD20A42		1.5 - 36	150	2.2	SA20DV	SA21DV	---	0.9	SB20DV	SB21DV	---	1.2	3.6	SC20DV	SC21DV	---	TE20A11	TE20A21	---	TE20A42		2.0 - 60	150	3.6	SA10DV	SA11DV	---	1.5	SB10DV	SB11DV	---	2.1	6.0	SC10DV	SC11DV	---	TE10A11	TE10A21	---	TE10A42		3.0 - 100	200	6.0	SA10DV	SA11DV	---	2.5	SB10DV	SB11DV	---	3.5	10.0	SC10DV	SC11DV	---	TF10A11	TF10A21	---	TF10A42																																																																																																																																																																																																																																																																																				
Fuel Gas and Fuel Oil																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
FM Approved	2 - 12" W.C.	25	1.5" W.C.	SA40DV	SA41DV	---	1.0" W.C.	SB40DV	SB41DV	---	1.4" W.C.	2.4" W.C.	SC40DV	SC41DV	---	TA40A11F	---	---	TA40A32F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	2 - 27" W.C.	25	2.0" W.C.	SA30DV	SA31DV	---	1.2" W.C.	SB30DV	SB31DV	---	1.7" W.C.	2.7" W.C.	SC30DV	SC31DV	---	TA30A11F	---	---	TA30A32F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	2 - 65" W.C.	25	2.5" W.C.	SA20DV	SA21DV	---	1.4" W.C.	SB20DV	SB21DV	---	2.0" W.C.	6.5" W.C.	SC20DV	SC21DV	---	TA20A11F	---	---	TA20A32F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	15 - 140" W.C.	40	6.0" W.C.	SA20DV	SA21DV	---	3.0" W.C.	SB20DV	SB21DV	---	4.0" W.C.	14.0" W.C.	SC20DV	SC21DV	---	TB20A11	---	---	TB20A32																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	15 - 250" W.C.	40	10.0" W.C.	SA10DV	SA11DV	---	6.0" W.C.	SB10DV	SB11DV	---	7.0" W.C.	25.0" W.C.	SC10DV	SC11DV	---	TB10A11	---	---	TB10A32																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	25 - 400" W.C.	40	15.0" W.C.	SA10DV	SA11DV	---	8.0" W.C.	SB10DV	SB11DV	---	13.0" W.C.	40.0" W.C.	SC10DV	SC11DV	---	TC10A11	---	---	TC10A32																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	0.4 - 4.5	100	0.4	SA40DV	SA41DV	---	0.3	SB40DV	SB41DV	---	0.5	0.7	SC40DV	SC41DV	---	TD40A11	TD40A21	---	TD40A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	0.8 - 9.0	100	0.6	SA30DV	SA31DV	---	0.3	SB30DV	SB31DV	---	0.5	0.9	SC30DV	SC31DV	---	TD30A11	TD30A21	---	TD30A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	1.0 - 18	100	1.1	SA20DV	SA21DV	---	0.4	SB20DV	SB21DV	---	0.5	1.8	SC20DV	SC21DV	---	TD20A11	TD20A21	---	TD20A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	1.5 - 36	150	2.2	SA20DV	SA21DV	---	0.9	SB20DV	SB21DV	---	1.2	3.6	SC20DV	SC21DV	---	TE20A11	TE20A21	---	TE20A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	2.0 - 60	150	3.6	SA10DV	SA11DV	---	1.5	SB10DV	SB11DV	---	2.1	6.0	SC10DV	SC11DV	---	TE10A11	TE10A21	---	TE10A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	3.0 - 100	200	6.0	SA10DV	SA11DV	---	2.5	SB10DV	SB11DV	---	3.5	10.0	SC10DV	SC11DV	---	TF10A11	TF10A21	---	TF10A42																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				

① Values shown are nominal. ② Manual reset units not available for FM.

③ 316 SS transducers increase deadband by 50%. ④ Transducers ending in 32 have 303 SS process connections, not 316 SS.

# OPTIONS Pressure/Temperature Switches

## H-Series, P-Series and S-Series Snap-Action Switch Options

Optional snap-action switches to meet specific electrical loads or application conditions are available on most ASCO TRI-POINT switch units. Generally, the construction of a switch unit with optional snap-action switches contains other specific parts and may be ordered only as a factory-built unit. To specify a particular optional construction, add the appropriate suffix to the switch unit catalog number, e.g., SA10D with optional gold contact snap-action switch (suffix "P") would become SA10D[P].

## P-Series Switch Options

**Panel Mount** – Open frame P-Series compact switch units are available for panel mounting with the switch unit inside and the transducer outside. The panel separates the fluid sensing portion from the electromechanical portion. Five holes for bolts and operating stem must be drilled or punched through the panel. Three constructions are available: add the suffix listed below to the switch unit catalog number for the desired thickness.

Description	Electrical Rating	Catalog Suffix	Deadband Variation From Listing
DC Rating 1 Amp Double Break	5 Amp, 125, 250 VAC 1/4 HP, 125 VAC 1/2 HP, 250 VAC 1 Amp, 125 VDC 1/2 Amp, 250 VDC	G	SA: +50% SB, SC, PA: +100% H: +200% PB: +400%
DC Rating 10 Amps, SPDT	10 Amp, 125 VAC, VDC 1/8 HP, 125 VAC, VDC	M	SA: +50% SB, SC, PA: +100% H: +120% PB: +400%
Double-pole Double-throw (Two SPDT Switches with Common Lever) Gold Contact Dry Circuit SPDT	5 Amp, 125, 250 VAC 1/8 HP, 125 VAC 1/4 HP, 250 VAC 1/2 Amp, 125 VDC 1/4 Amp, 250 VDC 1 Amp, 28 VAC 1 Amp, 28 VDC	K  P	SA, SB, SD, SE, PB: +50%  SA, SB, SC, PA: +25% H: +50% PB, PC: +100%
Hermetically Sealed SPDT	25 Amp Res, 28 VDC 10 Amp Ind, 28 VDC 5 Amp Motor, 28 VDC 3 Amp Lamp, 28 VDC 1 Amp, 125 VAC	H	SA, PA: +100% H: +200% PB: +600%
High Ambient 250°F SPDT	5 Amp, 125, 250 VAC 1/8 HP, 125 VAC 1/4 HP, 250 VAC 1/2 Amp, 125 VDC 1/4 Amp, 250 VDC	F	SA, SB, SC: +25%
High Power 1 HP SPDT	20 Amp, 125, 250 VAC 1 HP, 125 VAC 2 HP, 250 VAC 1/2 Amp, 125 VDC 1/4 Amp, 250 VDC	W	SA: +50% SB, SC: +100% PB: +400%
Moisture Resistant Sealed Switch SPDT	5 Amp, 125, 250 VAC 1/8 HP, 125 VAC 1/4 HP, 250 VAC 1/2 Amp, 125 VDC 1/4 Amp, 250 VDC	J	SA: None SB, SC, PA: +25% PB, H: +50%
Tight Fixed Deadband SPDT	5 Amp, 125, 250 VAC 1/8 HP, 125 VAC 1/4 HP, 250 VAC 1/2 Amp, 125 VDC	T	SB, SC: -50%

Panel Thickness	Suffix
10 Ga (.135±.005)	10
14 Ga (.075±.005)	11
16 Ga (.060±.005)	12

## S-Series Switch Options

**Industrial Adjusting Nut Covers** – Available in clear plastic or metal to prevent tampering with set point adjusting nuts.

**Clear plastic cover:** To order, add suffix "1" to the switch unit catalog number, or order separately as SP01.  
**Metal cover:** To order, add suffix "2" to the switch unit catalog number, or order separately as SP02.

**JIC Construction** – A switch unit having the electrical and adjusting nut covers attached to the switch body by a chain. Also designed to Type 13 specifications. To order, add suffix "3" to the switch unit catalog number, or order separately as SP03.

**Terminal Block** – Applicable to switch units with one single-poledouble-throw switch. The terminal strip is prewired to the snap-action switch. To order, add suffix "4" to the switch unit catalog number, or order separately as SP04.

**Factory Sealed** – Explosion-proof units may be ordered with a factory seal separating the electrical chamber from the conduit hubs and 24" long #14 AWG 105°C. rated lead wires. To order, change the fourth digit of the switch unit catalog number from "2" to "3", e.g., SA1[2]D becomes SA1[3]D.

## Pressure Transducer Options

**Special Wetted Materials** – The following diaphragms may be substituted on transducer body materials of aluminum, brass, polyester and stainless steel. To order, substitute the material code below in the seventh digit of the transducer catalog number, e.g., a TF10A1 [1] with optional viton diaphragm becomes a TF10A1 [2].

Diaphragm	Material Code	Temperature Range
Buna "N"	1	-4°F (-20°C) to 180°F (82°C)
Ethylene Propylene	6	-4°F (-20°C) to 250°F (121°C)
Neoprene	3	-4°F (-20°C) to 180°F (82°C)
Fluorosilicone	7	-40°F (-40°C) to 250°F (121°C)
Viton	2	-4°F (-20°C) to 250°F (121°C)

**Oxygen Cleaning** – Pressure transducers for oxygen service should be specially cleaned. They are degreased and blacklight inspected, then assembled in a clean area and tested with oil-free air or nitrogen. Use metal body transducer with viton or neoprene diaphragm and add suffix "H" to transducer catalog number, e.g., TA40A13 becomes TA40A13 [H].

**Pressure Snubbers** – A pressure snubber (1/4" NPTF by 1/4" NPTM) installed in the transducer pressure connection will dampen the pressure spikes to a value which will not cause damage. It consists of a body with a porous metal disc of stainless steel through which the fluid passes. To order, select a snubber compatible with the fluid. Available by separate catalog number only (see table below).

Fluid	Brass Catalog No.	303 SS Catalog No.
Air, Non-Hazardous Gases	TP04G2	TP04G3
Water, Light Oil (under 225 SSU)	TP04E2	TP04E3
Oil (Heavy, over 225 SSU)	TP04D2	TP04D3
Pressure Rating (psig)	2000	5000

**Process Connection** – A female process connection (1/4" NPT) is standard on all pressure transducers. A 1/2" NPT is available as an option on *gauge* pressure transducers. To order, add suffix "B" to transducer catalog number, e.g., RF10A21 becomes RF10A21 [B].

**Note:** Not available on nylon transducers.

## P-Series and S-Series Temperature Transducer Options

**Armored Capillaries** – Double braided copper armor is standard for copper capillary units. Stainless steel spiral interlocked armor is available for stainless steel capillary units. Add suffix "C" to transducer catalog number.

**Thermal Well**



**Thermal Well** ① – Use with direct or remote sensors for protecting sensing bulb. This allows removal of bulb while maintaining a pressure-tight vessel. Available in 1/2" NPT or 3/4" NPT process connection in brass or 316 SS. Dimensions are in accordance with SAMA Std. RC17-9. Standard "U" dimension (insertion length) is 2-1/2" for direct mount and 6' capillary units and is 4-1/2" for 12' capillary units.

Material	Pressure Rating (psig)	"U" Dimensions (Inches)	Process Connection	
			1/2" NPT Catalog No.	3/4" NPT Catalog No.
Brass	1000	2-1/2	QP03	QP04
		4-1/2	QP13	QP14
		7-1/2	QP23	QP24
		10-1/2	QP33	QP34
316 SS	6000	2-1/2	QP07	QP08
		4-1/2	QP17	QP18
		7-1/2	QP27	QP28
		10-1/2	QP37	QP38

**Longer Capillaries** – Standard copper and stainless steel capillary units can be furnished in 12' lengths. To order, add suffix "D" to transducer catalog number.

*Consult ASCO for longer length capillaries.*

Capillary Length (Feet)	Transducer Suffix	Bulb Length (Inches)	"U" Dimension Required (Inches)
6	---	3-1/2	2-1/2
12	D	5-1/2	4-1/2
13 - 20	E	5-1/2	4-1/2
21 - 50	F	8-1/2	7-1/2
51 - 80	G	11-1/2	10-1/2

**Union Connector** – For use with remote units for mounting of bulb in fluid being controlled. Available in 1/2" NPT and 3/4" NPT process connections in brass or 316 SS.



Material	Pressure Rating (psig)	Process Connection	
		1/2" NPT Catalog No.	3/4" NPT Catalog No.
Brass	500	QP01	QP02
316 SS	1500	QP05	---

① Jam nuts provided with thermal wells.

# Definitions and Fluid Compatibility Guide

## Definitions

**Accuracy** – The maximum deviation from the set point under specified operating condition (ambient temperature, barometric pressure, etc.).

**Adjustable Deadband** – Refers to the capability of a pressure or temperature switch to allow the deadband to be adjusted over a given range. Certain ASCO TRI-POINT switches have an adjustable deadband which can be adjusted over the total operating range of the switch.

**Adjustable Operating Range** – The pressure or temperature range of the switch within which the set point may be adjusted.

**Differential Pressure** – The difference between two pressures. A differential pressure switch senses two pressure sources and can be adjusted to actuate on a desired difference between them.

**Gauge Pressure** – The actual reading of a typical pressure gauge and is the difference between the pressure within a vessel and the atmospheric pressure surrounding it. It is normally measured in pounds per square inch (psig).

**Manual Reset** – The switch is a semi-automatic device which operates automatically with a signal change in one direction but must be manually reset once the signal returns to its original position.

**Proof Pressure** – A pressure which a device can be subjected to for extended periods of time without changes in its operating characteristics.

**Rated Overrange Temperature** – A temperature which a device can be subjected to for extended periods of time without changes in its operating characteristics.

**Repeatability** – The closeness of agreement among a number of consecutive measurements of the output for the same value of input under the same operating conditions approaching from the same direction. Repeatability is normally specified as a percentage of the upper limit of the operating range.

Example: Operating range 5-100 psig with  $\pm 1\%$  repeatability; equals  $\pm 1\%$  of 100 psig or  $\pm 1$  psig.

**Reset Point** – After a pressure or temperature switch has reached its set point and operated the electrical switch, it must return to a point called the reset point before the electrical switch can return to its original position.

**Set Point** – The pressure reading at which the electrical switch element changes contact position (it can be specified either increasing or decreasing).

**Switch Unit** – ASCO uses the term “switch unit” to describe the electromechanical portion of a pressure or temperature switch. This is used in conjunction with a transducer unit to form a complete pressure or temperature switch.

**Transducer Unit** – ASCO uses the term “transducer unit” to describe that portion of a pressure or temperature switch to which a pressure or temperature is applied which converts the input signal to another form of energy to operate the switch unit.

**Two-Stage (Dual)** – ASCO uses the term “two stage” to describe a pressure or temperature switch which is equivalent to two pressure or temperature switches which are independently adjustable. This switch is equivalent to two fixed deadband switches.


**Deadbands** – The deadband is the difference between the set point and reset point readings. Deadbands are listed in the specification tables at nominal values. They are representative of the deadbands of the units at the middle of the range.

The deadband values for the full range adjustable deadband switches and limited adjustable deadband switches indicate the values through which the deadband may be adjusted.

Generally, as the set point is adjusted through the operating range, the deadband will vary. Normally, it will become narrower as the set point is towards the bottom of the range, and will become wider when the set point is towards the top of the range. The graph shown below indicates representative trends of this type of deadband variation.

### Deadbands

1.5 x Catalog Value  
Catalog Value  
Half Catalog Value

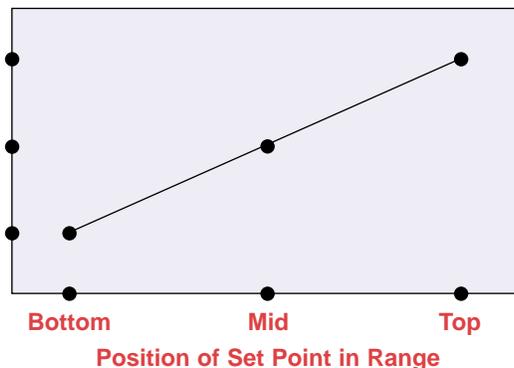

Temperature switch deadbands are a result of the characteristics of the vapor pressure curve as well as other factors. Normally, this results in a deadband which is narrower in the top third of the range than in the bottom third of the range. The values published are nominal and representative of mid-range set points.

# Fluid Compatibility Guide

These recommendations are to be used as a guide only, as service life of material is dependent on temperature, concentrations, or catalysts that may be added and other conditions which are beyond our control.

Consult ASCO for specific service applications.

**Note:** Items in black circles are standard catalog units.  
All others available on factory order.

**P** - Indicates preferred construction. **S** - Indicates satisfactory construction.

Transducer Material Code of Two Digits represents process connection material and diaphragm material, respectively; these are the sixth and seventh positions of the pressure transducer catalog number.

**Process Connection: 6th Position Diaphragm: 7th Position**

- |            |               |            |                      |
|------------|---------------|------------|----------------------|
| 1 Aluminum | 4 316 S.S.    | 1 Buna "N" | 4 316 S.S.           |
| 2 Brass    | 7 Nylon/Brass | 2 Viton    | 6 Ethylene Propylene |
| 3 303 S.S. |               | 3 Neoprene | 7 Fluorosilicone     |

Material Code	11	12	13	16	17	21	22	23	26	27	31	32	33	36	37	42	44	71	
	Vacuum	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Inches of Water	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
P.S.I.G. ⑤ to	400	400	400	400	400	3500	3500	3500	3500	3500	8000	8000	8000	8000	8000	8000	400	200	
Acetic Acid													S	S					P
Acetylene	P	S		S							S	S		S		S	S		
Air	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	P
Ammonia																			P
Argon-Welding ①	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	P
Benzene-Benzol		P					S					S				S	S		
Butane	P	S				S	S				S	S				S	S		
Carbon Tetrachloride												P				P	S		
Cellulube		P		S			S		S			S		S		S	S		
Coke Oven Gas												P				P	S		
Ethyl Alcohol (denatured)	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	
Ethylene Glycol	P	S	S	S		S	S	S	S		S	S	S	S		S	S		
Freon Refrigerants																			P
Freon Solvents ("MF", "TF", "BF")						P	S				S	S				S	S		
Fuel Oils and Diesel ④	P	S				S	S				S	S				S	S		
Gasoline																			P
Gas, Inert	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	P
Gas (natural and manufactured) ④	P	S	S		S	S	S	S		S	S	S	S		S	S	S		
Helium	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	P
Hydrogen	P	S	S	S		S	S	S	S		S	S	S	S		S	S		
Jet Fuel (JP1 to JP6)		P			S		S			S		S			S	S	S		
Kerosene	P	S				S	S				S	S							
Methyl Alcohol (Methanol)	P		S	S	S	S		S	S	S	S	S	S	S	S	S	S		
Naphtha	P	S				S	S				S	S				S	S		
Nitrogen	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	P
Oils (coolant, hydraulic, lubricating and motor)	P	S				S	S				S	S				S	S		P
Oxygen, Gaseous ②		S	P		S		S	S		S		S	S		S	S	S		
Potassium Sulfate	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
Propane Gas and Liquid	P	S	S			S	S	S			S	S	S			S	S		
"Pydraul" ("Monsanto")		P			S		S			S		S			S	S	S		
Steam ③						P	S		S	S	S	S		S	S	S	S		
Steam Condensate						P	S		S	S	S	S		S	S	S	S		P
Stoddard Solvent	P	S				S	S				S	S				S	S		
Toluene (Tolulo)		P					S					S				S	S		
Vacuum	P	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
Vegetable Oil	P	S	S		S						S	S	S		S	S	S		
Vinegar												S		S	S	S	P		
Water, Fresh, Boiler Feed						P	S		S	S	S	S		S	S	S	S		P
Water (Distilled, Deionized, Demineralized)											P	S	S	S	S	S	S		
Water, Sea																			S

**Notes:** ① For high purity applications use stainless steel transducers. ② Oxygen service requires special cleaning, specify suffix "H". ③ For steam service a condensate loop (pigtail) is required. ④ For pressure transducers for combustion service see pages 20-23. ⑤ Material availability refers to standard gauge pressure constructions only.