



GEMÜ



**Valves, Measurement
and Control Systems**

GEMÜ Group

Through continuous innovative design and a focus on quality and staying close to our customers, GEMÜ is one of today's leading worldwide manufacturers of valves, measurement and control systems.

We have achieved this status by investing extensively in application research and development. After more than 55 years of healthy growth, Gert Müller, son of founder Fritz Müller, now directs our independent family-owned enterprise alongside his cousin Stephan Müller.



GEMÜ Team
2200+



Countries
Subsidiaries and long-term
commercial partners



With our wide product range, we offer solutions for the most varied industrial sectors. To be closer to our customers, we operate in three strategic business units:



Diaphragm valves

Features


- Very good cleanability (minimal deadleg)
- Hermetic separation of the medium from the actuator
- Optional flow direction

Typical working media

- Inert and corrosive media
- Liquids: Water, pharmaceutical quality water, hygienic and aseptic products, cleaning media, slurries and chemicals
- Steam: Ultra pure steam, saturated steam, black steam
- Slurries, powder and dust
- For ultra pure to heavily contaminated abrasive media

Technical specifications

- Nominal sizes
 - Plastic: DN 4 to 100
 - Metal: DN 4 to 300
- Media temperature
 - Plastic: up to 150 °C
 - Metal: up to 100 °C
- Operating pressure: up to 10 bar

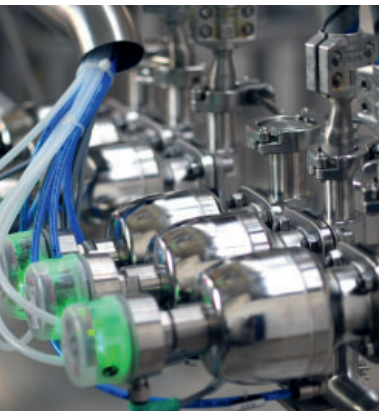

Actuators

- Manual
- Pneumatic
- Motorized

Body configurations


- Full bore design
- Weir-type design
 - 2/2-way bodies
 - Welding configurations
 - T bodies
 - i-bodies
 - Multi-port bodies

Body materials

- Plastic (ABS, PFA, PP, PVC, PVDF)
- Metal (brass, cast iron, SG iron)
- Stainless steel (1.4408, 1.4435, 1.4539)
- Also with plastic lining

Seal materials

- One-piece diaphragm: CR, EPDM, FKM, IIR, NBR, NR
- Two-piece diaphragm: PTFE/EPDM, PTFE/FKM
- Three-piece diaphragm: PTFE/PVDF/EPDM

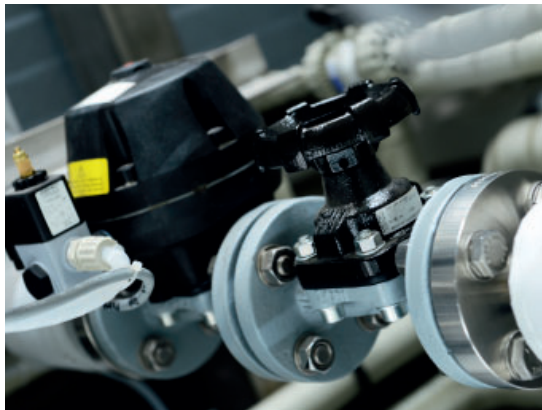


M-block solutions

Features

- Customized, flexible design that is optimized for draining
- GMP-compliant design
- Compact design and consequently greatly reduced deadlegs
- Increased product reliability
- Reduced and simple validation by getting rid of internal weld seams and combining in a single valve body

Typical working media

- Liquids: Water, pharmaceutical quality water, hygienic and aseptic products, cleaning media
- Steam: Ultra pure steam, saturated steam, black steam
- Inert and corrosive media
- Clean and contaminated abrasive media
- Liquids and gases
- Slurries and chemicals
- Cleaning agents, detergents
- Acids and alkalis

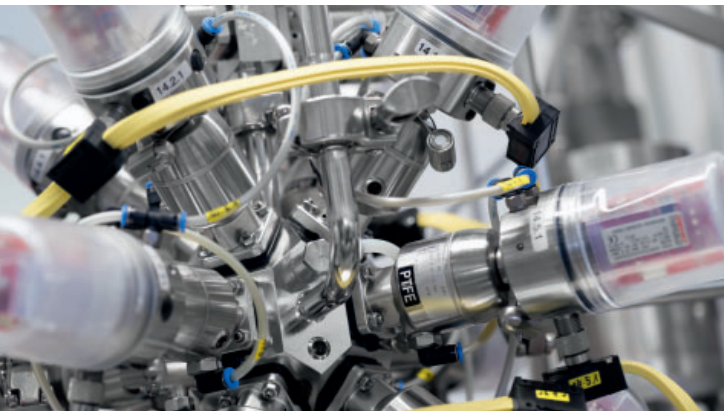

Technical specifications

- Nominal sizes: DN 4 to 150
- Media temperature: 100 °C
- Operating pressure: 0 to 10 bar

Actuators

- Manual
- Pneumatic
- Motorized

Body configurations

- Customized
- Can be extended in modular form

Body materials

- Stainless steel (1.4435, 1.4539)
- Plastic (PFA, PTFE, PP-H, PVC-U, PVDF)

Seal materials

- One-piece diaphragm: CR, EPDM, FKM, IIR, NBR, NR
- Two-piece diaphragm: PTFE/EPDM, PTFE/FKM
- Three-piece diaphragm: PTFE/PVDF/EPDM
- PD: PTFE, 1.4435/FKM/PTFE



Tank valves

Features

- Versions for tank bottom, tank wall or tank cover available
- Customized design possible
- Simple welding into the tank bottom possible via integrated welding neck
- Minimal deadlegs and optimized draining capabilities
- CIP/SIP capable

Technical specifications

- Nominal sizes: DN 4 to 150
- Media temperature: up to 100 °C
- Operating pressure: up to 10 bar

Actuators

- Manual
- Pneumatic

Body materials

- Stainless steel (1.4435, 1.4539)



Sampling systems

Features

- Suitable for contamination-free sampling
- Special materials and customized test requirements possible
- Compact design for installation in tight spaces
- Minimal deadlegs and optimized draining capabilities
- CIP/SIP capable

Technical specifications

- Nominal sizes: DN 4 to 15
- Media temperature: up to 100 °C
- Operating pressure: up to 10 bar

Actuator

- Manual
- Pneumatic

Body materials

- Stainless steel (1.4435, 1.4539)



Single-use solutions

Feature

- Hermetic separation of the media wetted area

Production & Quality management

- Cleanroom manufacturing and assembly in cleanroom class 8 acc. to EN ISO 14644-1 with access and contamination control
- Manufactured in accordance with GMP
- FDA registered manufacturing site
- TSE/BSE compliant
- Transport validation as per ISTA

Media wetted materials

- USP & EP compliant purity
- ISO 10993 compatibility
- Use of FDA compliant plastics
- Sterilization acc. to ISO 11137
- Radiation sterilization by X-ray or gamma irradiation (certified radiation dosage > 25 kGy)

Typical working media

- Acids, alkalis, buffer media, saline solutions



Single-use valve designs

- Diaphragm valves
 - Nominal sizes: 1/4" (DN 8) to 1" (DN 25)
 - Operating pressure up to 4.9 bar
 - Media temperature: 5 to 40 °C
 - Body configurations: 2/2-way bodies, angle valve bodies, T bodies, customized multi-port valve blocks
 - Actuator versions: Manual, pneumatic, motorized
- Pinch valves
 - Nominal sizes: 1/4" (DN 8) to 1" (DN 25)
 - Operating pressure up to 6 bar
 - Actuator versions: Pneumatic, motorized

Single-use components

- Mixers
- Distribution plates
- Fittings
- Sensor blocks
- Customized components

Single-use flowpath

- Customized assembly
- Individually configurable



Diaphragm globe valves

Features

- CIP/SIP capable and autoclavable (only stainless steel versions)
- Available with linear or equal-percentage control characteristic
- Hermetic separation of the actuator from the medium using a sealing diaphragm
- High number of cycle duties
- Various valve body connections available
- Customized block designs possible
- Compact design
- No "lift effect" thanks to the use of the GEMÜ PD design

Typical working media

- Inert and corrosive media
- Liquids and gases

Technical specifications

- Nominal sizes:
 - Plastic: DN 4 to 25
 - Metal: DN 8 to 65
- Media temperature:
 - Plastic: up to 200 °C
 - Metal: up to 160 °C
- Operating pressure: up to 10 bar



Actuators

- Manual
- Pneumatic
- Motorized

Body configurations


- 2/2-way bodies
- Angle valve bodies
- Multi-port bodies

Body materials

- Stainless steel (1.4435)
- Plastic (PP, PVDF, PVC, PTFE)

Seal materials

- PTFE
- 1.4435/FKM/PTFE

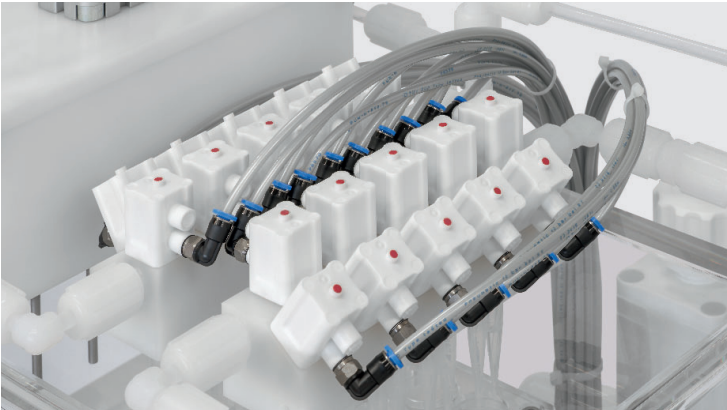

Globe valves

Features

- Fast cycle duties
- High switching frequencies
- Very good control characteristics

Typical working media

- Liquids: Water, glycol, cooling lubricant, sodium hydroxide
- Steam: Black steam, saturated steam
- Gases: Air, nitrogen, oxygen

Technical specifications

- Nominal sizes: DN 6 to 150
- Media temperature: up to 185 °C*
- Operating pressure: up to 40 bar

**higher temperatures possible as an option*



Actuators

- Manual
- Pneumatic
- Motorized

Body configurations

- Straight seat bodies
- Angle seat bodies
- 3/2-way bodies
- Angle valve bodies

Body materials

- Stainless steel (1.4408, 1.4435)
- Metal (cast bronze, SG iron)
- Plastic (PVC-U, PVDF)
- In addition: Wide choice of gland packings



Ball valves

Features

- High flow rates
- High operating pressures
- High temperatures

Typical working media

- Liquids: Water, glycol, cooling lubricant
- Gases: Air, compressed air
- Suitable for pure and non-crystallising media

Technical specifications

- Nominal sizes: DN 8 to 150
- Media temperature: up to 220 °C
- Operating pressure: up to 137 bar



Actuators

- Manual
- Pneumatic
- Motorized

Body configurations

- 2/2-way bodies
- 3/2-way bodies

Ball options

- Full and reduced bore
- T- or L-bores

Body materials

- Stainless steel (1.4404, 1.4408, 1.4435)
- Plastic (ABS, PP, PVC, PVDF)

Seal material

- PTFE



Butterfly valves

Features

- Large range of nominal sizes
- Short length
- Low weight
- Fast operating time
- Simple installation and low maintenance requirements

Typical working media

- Liquids: Water, oils, acids, alkalis, surfactants, solvents, heating media/coolants
- Gases: Steam, air, nitrogen, natural gas, noble gases, vapour
- Solids: Bulk materials

Technical specifications

- Nominal sizes: DN 15 to 1600
- Media temperature: up to 230 °C
- Operating pressure: up to 40 bar



Actuators

- Manual
- Pneumatic
- Motorized

Body configurations


- Wafer
- Lug
- U section

Body materials

- Metal (cast iron, SG iron, cast steel, brass, aluminium, stainless steel)
- Plastic (PVC-U, PP)
- In addition: Wide choice of disc materials

Seal materials

- Soft seal: CR, CSM, ECO, EPDM, FKM, NBR, SBR, silicone
- PTFE seal: PTFE/EPDM, PTFE/FKM, PTFE/silicone, PTFE/EPDM, PTFE/FKM, PTFE/silicone

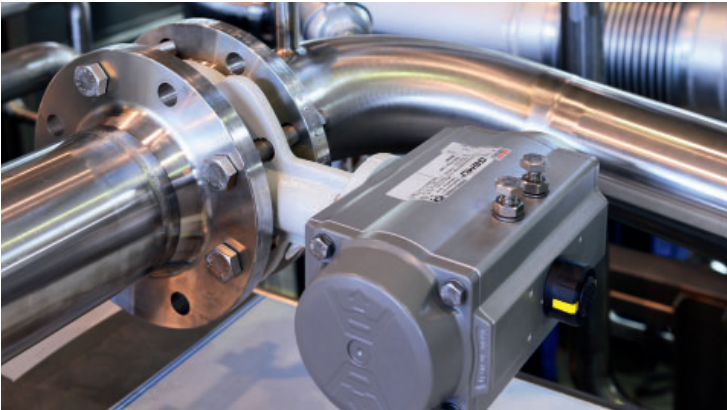

Process solenoid valves

Features

- High cycle duties possible
- Very sensitive to contamination
- Corrosion-resistant
- Ideal dosing valve for small to very small quantities
- Preferred flow direction over the seat

Typical working media

- Inert and corrosive media
- Liquids and gases

Technical specifications

- Nominal sizes: DN 8 to 50
- Media temperature: up to 150 °C
- Operating pressure: up to 20 bar

Body configurations

- 2/2-way bodies

Body materials

- Plastic (PVC, PVDF)
- Metal (brass)
- Stainless steel (1.4408)



Pressure control valves

Features

- All media wetted parts are made of highly resistant plastic
- No auxiliary power required
- Low maintenance
- Can be installed irrespective of location

Technical specifications

- Nominal sizes: DN 10 to 100
- Media temperature: up to 100 °C
- Operating pressure: up to 10 bar

Body configurations

- 2/2-way bodies
- T bodies

Body materials

- Plastic (PP, PVC, PVDF)



Check valves and strainers

Features

- Universal components for pipeline construction
- Easy assembly and maintenance
- Wide range of functional principles and materials

Technical specifications

- Nominal sizes: DN 6 to 600
- Media temperature: up to 400 °C
- Operating pressure: up to 40 bar

Designs

- Check valves made of metal and plastic
- Angle seat check valve made of metal
- Strainer made of plastic

Body materials

- Metal (stainless steel, galvanized cast steel, SG iron)
- Plastic (PP, PVC, PVDF, PTFE)



Connection technology

Features

- Over 1000 different fittings
- High-quality tubes
- Produced under cleanroom conditions in compliance with DIN 16901-140
- High reliability

Technical specifications

- Nominal sizes: DN 4 to 32
- Media temperature: up to 250 °C
- Operating pressure: up to 6 bar

Materials

- Tube/fitting (PFA)
- Union nut (PFA, PTFE, PVDF)



Positioners and process controllers

Features

- Precise control of temperature, pressure, flow and level possible
- Versions for pneumatic quarter turn or linear actuators as well as motorized actuators
- Direct or remote mounting
- Versions with field bus capability

Technical specifications

- Flow rate: 15 NI/min to 300 l/min
- Linear measuring range: up to 75 mm
- Radial measuring range: up to 90°
- Communication modes: DeviceNet, Profibus, ProfiNet

Designs

- Electro-pneumatic positioner
- Electro-pneumatic positioner with integrated process controller
- Controller



For pneumatic actuators, our positioners and process controllers are fitted ex works, tested and delivered as an entire system.

Not only can you obtain all components from a single source, you also reduce the effort required for logistics and installation of the system on site, as well as for documentation.

For motorized actuators, the controller is mostly fully integrated. These actuators are an optimum alternative to control valves in sterile environments or when considering service life.

If required, the positioner in question can also be commissioned at the place of use by GEMÜ service engineers.



Electrical position indicators and combi switchboxes

Features


- For monitoring linear and quarter turn valves
- Monitoring of set limiting values and/or continuous valve position feedback
- Manual or automatic end position programming during initialization
- Combi switchboxes with integrated pilot valve
- ATEX versions
- Versions with field bus capability

Technical specifications

- Linear measuring range: up to 75 mm
- Radial measuring range: up to 90°
- Communication modes: AS-Interface, DeviceNet, IO-Link

Designs

- 2-wire proximity switch (NAMUR)
- Microswitch
- 3-wire proximity switch

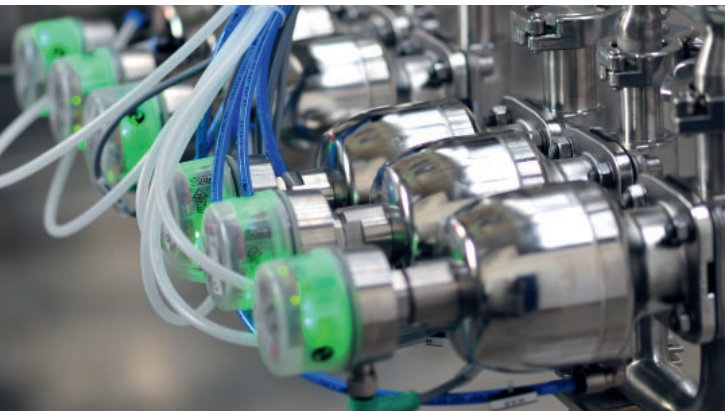

Pilot valves

Features


- Robust design
- Coil easy to replace
- Integrated LEDs as an option

Technical specifications

- Nominal sizes: DN 2 to 7
- Media temperature: up to 60 °C
- Operating pressure: up to 10 bar

Designs

- Single valves
- Valve batteries
- Valve manifolds

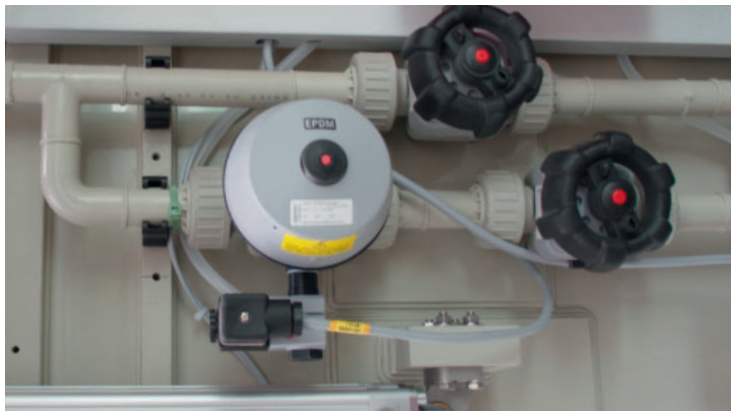

Measurement devices

Features

- High accuracy
- Simple operation
- Versions with field bus capability

Designs

- Variable area flowmeters
- Electrical flowmeters
- Temperature measurement devices
- Pressure measurement devices

Measuring ranges

- Liquids: 0.5 to 1,150,000 l/h
- Gases: 0.2 to 450 Nm³/h
- Temperature: -40 to 150 °C
- Pressure: 0 to 40 bar




GEMÜ Systems

As a manufacturer of valve, measurement and control systems, we do not only sell standard products. We support you with your individual requirements, from inquiries about customized individual components and ready-to-fit assemblies through to the joint development of complete systems.

What we offer

- Precise analysis of the framework conditions and requirements
- Idea generation using state-of-the-art design tools
- CAD concepts, 3D printing, test rigs and prototype construction
- Customized valve configurations
- Sample and low-volume production
- Process optimization and special solutions
- Support in the procurement process

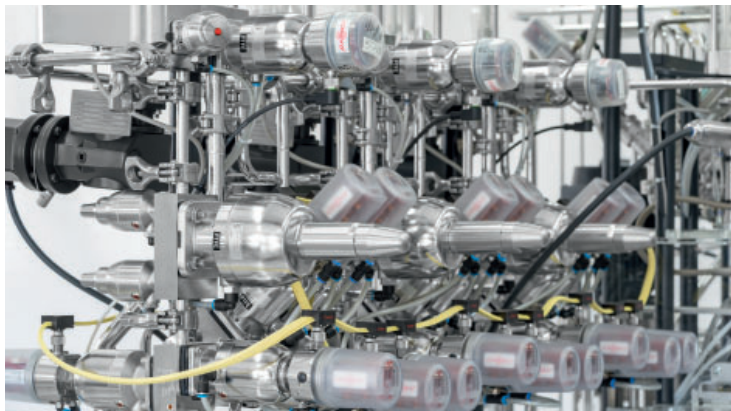

Worldwide presence

AUSTRALIA

GEMÜ Australia Pty. Ltd
Phone: +61-2-43 23 44 93
Fax: +61-2-43 23 44 96
mail@gemu.com.au

AUSTRIA

GEMÜ GmbH
Phone: +43 22-36 30 43 45-0
Fax: +43 22-36 30 43 45-31
info@gemue.at

BELGIUM

GEMÜ Valves bv/srl
Phone: +32 2 702 09 00
Fax: +32 2 705 55 03
info@gemue.be

BRAZIL / LATAM

GEMÜ Indústria de Produtos
Plásticos e Metalúrgicos Ltda.
Phone: +55 41 3382 2425
Fax: +55 41 3382 3531
gemu@gemue.com.br

CANADA

GEMÜ Valves Canada Inc.
Phone: +1-450-902-2690
Fax: +1-404-3 44 4003
info@gemu.com

CHINA

GEMÜ Valves (China) Co., Ltd
Phone: +86-21-2409 9878
info@gemue.com.cn

DENMARK

GEMÜ ApS
Phone: +45 70 222 516
info@gemue.dk

FRANCE

GEMÜ S.A.S
Phone: +33-3 88 48 21 00
info@gemu.fr

INTERCARAT

Phone: +33-3 88 48 21 20
sales@intercarat.com

GERMANY

GEMÜ Gebr. Müller
GmbH & Co. KG
Phone: +49 (0)7940-12 30
Fax: +49 (0)7940-12 31 92
(Domestic)
Fax: +49 (0)7940-12 32 24
(Export)
info@gemue.de

Inevvo solutions GmbH & Co. KG
Phone: +49 (0)7940-12 38 681
info@inevvo-solutions.com

GREAT BRITAIN / UK

GEMÜ Valves Ltd.
Phone: +44-19 25-82 40 44
Fax: +44-19 25-82 80 02
info@gemu.co.uk

HONG KONG

GEMÜ (Hong Kong) Co., Ltd.
Phone: +852 6873 8280
Fax: +852 6873 8280
info@gemue.com.cn

INDIA

GEMÜ India Branch Office
Phone: +91 (79) 6818 1400
Fax +91 (79) 6818 1499
sales@gemu.in

INDONESIA

Gemu Valves Pte Ltd
(Indonesia Representative Office)
Phone: +62 (21) - 6231 0035
Fax +62 (21) - 2907 4643
info@gemu.co.id

IRELAND

GEMÜ Ireland Ltd
Phone: +353 (0)21 4232023
Fax: +353 (0)21 4232024
info@gemue.ie

ITALY

GEMÜ S.r.l.
Phone: +39-02-40044080
Fax: +39-02-40044081
info@gemue.it

JAPAN

GEMÜ Japan Co., Ltd.
Phone: +81-52-936-2311
Fax: +81-52-936-2312
info@gemu.jp

MALAYSIA

GEMU VALVES MALAYSIA
SDN. BHD.
Phone: +(603)- 7832 7640
Fax: +(603)- 7832 7649
info@gemu.com.sg

MEXICO

GEMU Valvulas S.A. de C.V.
German Centre
01210 Mexico, D.F.
Phone: +52 55 7090 4161
+52 55 7090 4179

RUSSIA

ООО „GEMÜ GmbH“
Phone: +7(495) 662-58-35
Fax: +7(495) 662-58-35
info@gemue.ru

SINGAPORE

GEMÜ Valves PTE. LTD.
Phone: +65-65 62 76 40
Fax: +65-65 62 76 49
info@gemu.com.sg

SOUTH AFRICA

GEMÜ Valves Africa Pty. Ltd
Phone: +27 11 462 7795
Fax: +27 11 462 4226
info@gemue.co.za

SWEDEN

GEMÜ Armatur AB
Phone: +46-31-996500
order@gemu.se

SWITZERLAND

GEMÜ GmbH
Phone: +41-41-7 99 05 05
Fax: +41-41-7 99 05 85
info@gemue.ch

GEMÜ Vertriebs AG
Phone: +41-41-7 99 05 55
Fax: +41-41-7 99 05 85
vertriebsag@gemue.ch


TAIWAN

GEMÜ Taiwan Ltd.
Phone: +886-3-550-7265
Fax: +886-3-550-7201
office@gemue.tw

UNITED STATES

GEMÜ Valves Inc.
Phone: +1-678-5 53 34 00
Fax: +1-404-3 44 93 50
info@gemu.com

 GEMÜ manufacturing site

 GEMÜ subsidiary

In addition to these subsidiaries, GEMÜ has a global partner network.

Contact details:

www.gemu-group.com/en_GB/kontakte/



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG

Fritz-Müller-Straße 6–8 · DE-74653 Ingelfingen-Criesbach

Phone +49 (0)7940 123-0 · info@gemu.de

www.gemu-group.com